



UNIT:MM

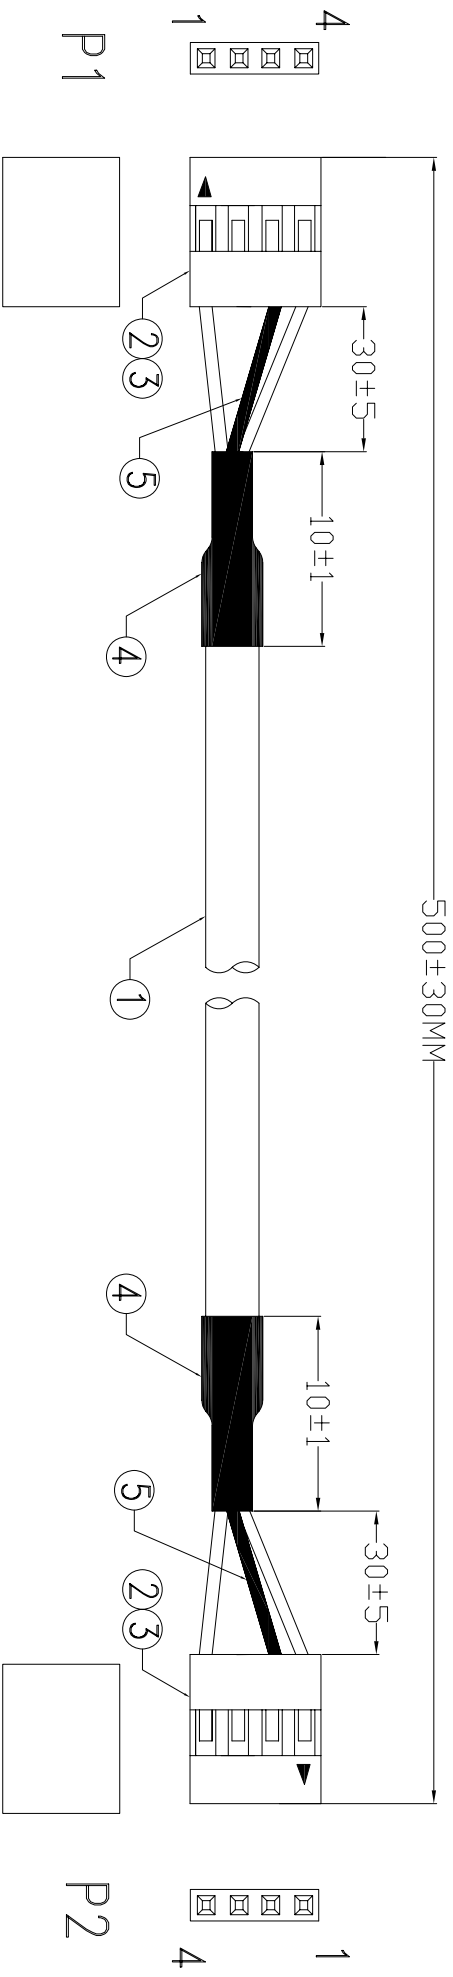

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 1 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

PIN ASSIGNMENT:

P1	WHITE	P2
1	_____	4
3	DRAIN	2
4	RED	1

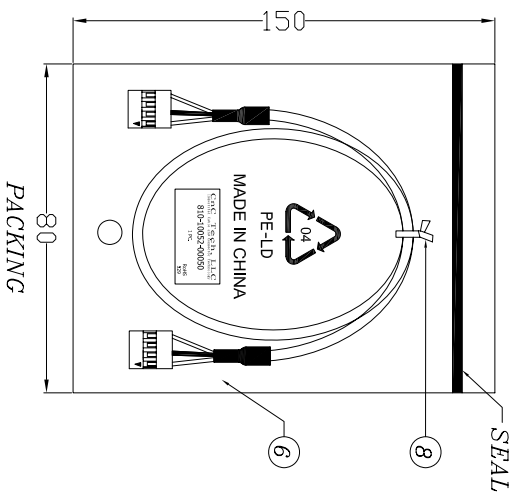

PACKING

⑧	TIE	1	WHITE L=60mm
⑦	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+ "10PCS" 及印生产周期,有透气孔.
⑥	PE BAG	1	CLEAR SIZE: 80*150*0.05mm PRINT BLACK"MADE IN CHINA"及印生产周期,有透气孔.
⑤	TUBE	2	HEAT SHRINK TUBE BLACK OD1. 0* L=38 ± 1mm
④	TUBE	2	HEAT SHRINK TUBE BLACK OD3. 0* L=10 ± 1mm
③	TER	6	杜邦 TER PH2. 54mm MATERIAL: BRASS TIN-PLATED CRIMP TYPE
②	HSG	2	杜邦 HSG. 1*4P PH: 2. 54mm COLOR: BLACK
①	CABLE	1	LU2547 28AWG*2C (WHITE, RED) +D JACKET GREY (A-112#) OD2. 8mm
NO.	NAME	Q'TY	SPECIFICATION

**Cnc Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN BY	licheng	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	810-10052-00050
DECIDE BY		DATE	2012-12-17
VERSIONS/EDITION	A/0	PROJECTION	