

DESCRIPTION

MK21 sensors are magnetically operated Reed proximity switches designed for screw mounting. The sensor should be mounted on a fixed surface with the actuating magnet on the moving surface. Introduction or removal of the magnetic field determines the closing and opening of the Reed Switch. Leads are teflon coated.



APPLICATIONS


- **Position and limit switch**
Pneumatic or hydraulic actuator position
- **End motion detection for linear drive**
Indication and end travel limit switch
- **Machine industry**
End motion detection and door/flap control

FEATURES

- High power switches available
- Other cables, connectors and colors available
- Various case sizes available
- Four operate sensitivities available
- A choice of cable terminations and lengths are available

DIMENSIONS

All dimensions in mm [inches]

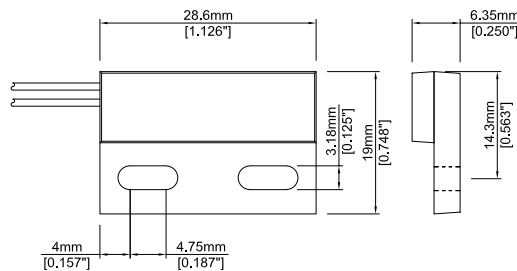

MK21 Series

MEDER electronic

Reed Sensors with Mounting
Holes for Screw Fastening

ORDER INFORMATION

SERIES	CONTACT FORM	SWITCH MODEL	MAGNETIC SENSITIVITY	CABLE LENGTH (mm)	TERMINATION
MK21 -	1A	XX	X -	XXX	W
OPTIONS		71	B, C, D, E	500 *	
		84	C, D, E		

* Other cable lengths available.

Part Number Example

MK21 - 1A71 C - 500 W


71 is the switch model
C is the magnetic sensitivity
500 is the cable length (mm)

MAGNETIC SENSITIVITY

SENSITIVITY CLASS	PULL IN AT RANGE
B	10 - 15
C	15 - 20
D	20 - 25
E	25 - 30

TERMINATION

For wire and termination details please contact factory.

W		The cable cut length includes: 5mm of wire stripped and tinned
---	---	---

www.meder.com

Germany # ++49-(0)7733-94870, USA # 800-870-5385

CONTACT DATA

All data at 20 °C	Switch Model --> Contact Form -->	Contact 71 Form A			Contact 84 Form A			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Contact Ratings	Conditions							
Contact Rating	Any DC combination of V & A not to exceed their individual max.'s			10			10	W
Switching Voltage	DC or peak AC			200			400	V
Switching Current	DC or peak AC			0.5			0.5	A
Carry Current	DC or peak AC			1.25			1.0	A
Static Contact Resistance	w/ 0.5V & 10mA			150			150	mΩ
Dynamic Contact Resistance	Measured w/ 0.5V & 50mA 1.5 ms after closure			200			200	mΩ
Insulation Resistance across Contacts	100 Volts applied	10 ¹⁰ *			10 ¹¹			Ω
Breakdown Voltage across Contacts	Voltage applied for 60 sec. min.	225 *			700			VDC
Operate Time, incl. Bounce	Measured w/ 50% overdrive			0.5			2.0	ms
Release Time	Measured w/ no coil suppression			0.1			0.1	ms
Capacitance	@ 10kHz across contact		0.2			0.7		pF
Contact Operation **								
Must Operate Condition	Steady state field	10		30	15		30	AT
Must Release Condition	Steady state field	4		27	6		27	AT
Environmental Data								
Shock Resistance	1/2 sine wave duration 11ms			50			50	g
Vibration Resistance	From 10 - 2000 Hz			20			20	g
Ambient Temperature	10 °C/ minute max. allowable	-20		85	-20		85	°C
Storage Temperature	10 °C/ minute max. allowable	-35		85	-35		85	°C
Soldering Temperature	5 sec. dwell			260			260	°C
Please note: The indicated electrical data are maximum values and can vary downwards when using a more sensitive switch. * Insulation resistance of 10 ¹² and breakdown voltage of 480VDC is available. ** These ranges refer to the uncut / unmodified Reed Switches described in our Reed Switch section. Consult factory if more detail is required.								