


N=Number of contacts

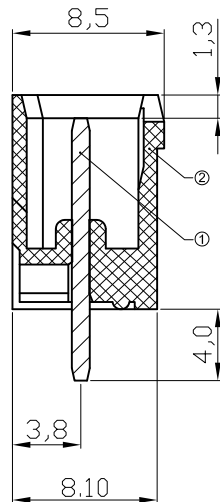

NOTES:

MATERIAL


- 1.Item Ⓞ Contact pin: Brass(CuZn)Tin plated
- 2.Item Ⓞ Insulator (housing):Thermoplastic (UL 94V-0),green

ELECTRICAL

- 1.Current Rating : 20A
- 2.Voltage Rating : 300V
- 3.Withstand Voltage : 1.6KV

ENVIRONMENTAL

- 1.Soldering Temperature: 250°C ±10°C/5 Sec
- 2.Operating Temperature: -40°C to +115°C
- 3.Safety approval: us

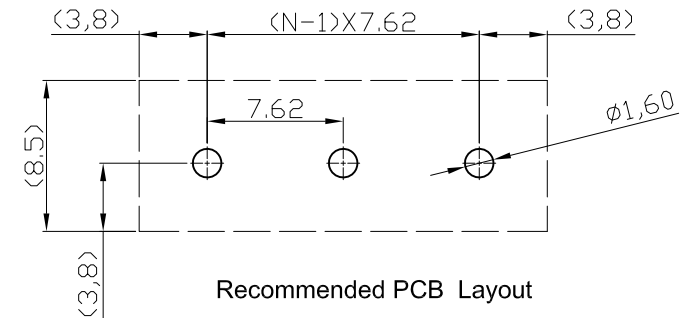

RoHS compliant

Scale	1:1						Date	Name	Customer-No.	
TOLERANCE						Drawn	19.03.2009	Dean	ASSMANN WSW-No. A-TB762-OQXXCV	
X.	±0.50					Approved	19.03.2009	Hellwig		
X.X	±0.30									
X.XX	±0.10									
DIM	TOL								Drawing-No.	
X.°	±1°								ASS 3419 CO	rev01
X.X°	±X°	①	Drawn	19.03.2009	Dean			Replace	Sheet	
Angle	TOL	Id.	Modification	Date	Name					