

Output Connector Options

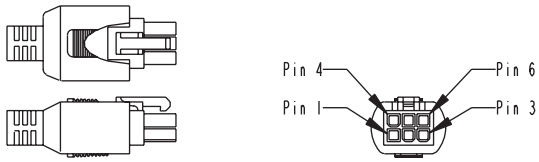
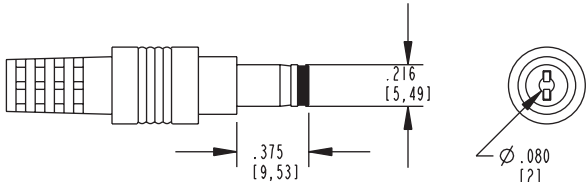
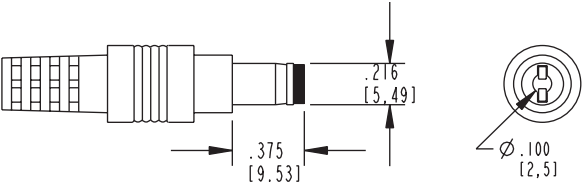
Rev 4 [8-20-2004]

Model No.	Profile and Dimensions	Pinout Code	Description	Suggested Mating connector
2		Center Contact Positive	Miniature Power Plug High Retention	Switchcraft 722A Jack or equivalent
3		Center Contact Positive	Miniature Power Plug High Retention	Switchcraft 712A Jack or equivalent
12		Optional	5-pin Din 180-male connector	Various styles of straight or right angle panel or p.c. mounted Din connectors
40		Center Contact Positive	Miniature Power Plug Right Angle or equivalent High Retention	Switchcraft jack 722A or equivalent
41		Center Contact Positive	Miniature Power Plug Right Angle or equivalent High Retention	Switchcraft jack 712A or equivalent
44		Center contact: positive	Miniature Molded Locking Power Plug Switchcraft S760K or equivalent (Molded or Assembly Style) Non-High Retention	Switchcraft jack 722A or equivalent
45		Center contact: positive	Miniature Molded Locking Power Plug Switchcraft 760K or equivalent (Molded or Assembly Style) Non-High Retention	Switchcraft jack 712A or equivalent
49		Optional	Snap and lock power plug 4-pin Prefer 20AWG Kycon Kpp-4p or equivalent	Kycon KPJ-4S socket or equivalent

ALL DIMENSIONS ARE TYPICAL. EXACT DIMENSIONS AVAILABLE UPON REQUEST.

Output Connector Options

Rev 4 [8-20-2004]

Model No.	Profile and Dimensions	Pinout Code	Description	Suggested Mating connector
51		Optional	Minifit Overmolded by Ault Inc. 6 Pos Molex 39-01-2060 Max Wire 18AWG or equivalent	Plug Molex 39-01-2060 or 3063 or equivalent
72		Center Contact Positive	Miniature Power Plug or equivalent High Retention No-Sparky	Switchcraft 712A jack or equivalent
73		Center Contact Positive	Miniature Power Plug or equivalent High Retention No-Sparky	Switchcraft 712A jack or equivalent

ALL DIMENSIONS ARE TYPICAL. EXACT DIMENSIONS AVAILABLE UPON REQUEST.