

# FG11X5R0J107MRT00



## Application

Commercial Grade

## Series

FG11



## Dimensions

- L 5.5mm Max.
- W 7mm Max.
- T 4mm Max.
- F 2.5mm +/-0.8mm
- d 0.5mm +0.1,-0.03mm
- l 7mm +/-2mm

## Temperature Characteristic

-55 to 85°C +/-15%

## Rated Voltage

6.3Vdc

## Capacitance

100uF

## Capacitance Tolerance

+/-20%

## Dissipation Factor

15% Max.


## Insulation Resistance

1Mohm Min.


## AEC-Q200

No


**|Z| vs. Freq. Characteristic**

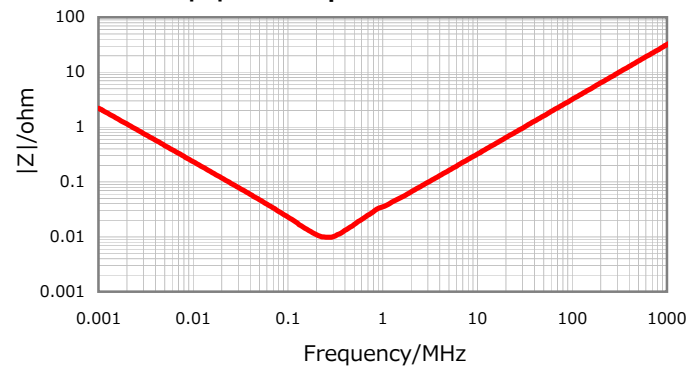

**DC Bias Characteristic**

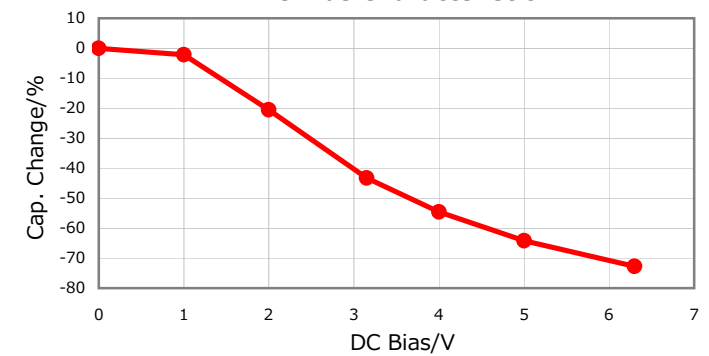

**Cap. vs. Freq. Characteristic**

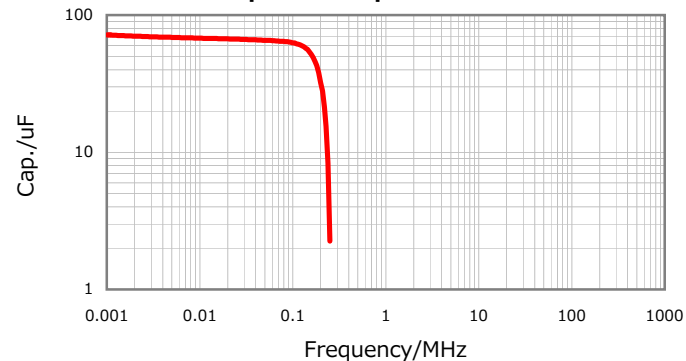

Characterization Sheet (MLCC with Dipped Radial Lead)



All specifications are subject to change without notice.