

## Panel feed-through - SACC-EC-M12FS-4CON-PG 9/0,5 VA - 1554649

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Sensor/actuator flush-type socket, 4-pos., M12, A-coded, front/screw mounting with Pg9 thread, can be positioned, with 0.5 m TPE litz wire, 4 x 0.34 mm<sup>2</sup>, stainless steel version



### Key commercial data

Packing unit	1 1
Weight per Piece (excluding packing)	25.8 GRM
Custom tariff number	85444290
Country of origin	Germany

### Technical data

#### Dimensions

Length of cable	0.5 m
-----------------	-------

#### Ambient conditions

Ambient temperature (operation)	-25 °C ... 85 °C (Plug / socket)
Degree of protection	IP65
	IP67
	IP69K

#### General

Rated current at 40°C	4 A
Rated voltage	250 V
Number of positions	4
Contact resistance	≤ 3 mΩ
Insulation resistance	> 100 MΩ
Coding	A - standard
Standards/regulations	M12 connector IEC 61076-2-101
Signal type/category	Universal

# Panel feed-through - SACC-EC-M12FS-4CON-PG 9/0,5 VA - 1554649

## Technical data

### General

Status display	No
Surge voltage category	II
Pollution degree	3
Connection method	Individual wires

### Material

Inflammability class according to UL 94	V0
Contact material	CuZn
Contact surface material	Au
Contact carrier material	PA66 GF
Material, knurls	High-grade steel
Sealing material	FKM

### Cable

Cable type	TPE litz wire
Conductor cross section	0.34 mm <sup>2</sup>
AWG signal line	22
Conductor structure signal line	7x 0.25 mm
Core diameter including insulation	1.2 mm ±0.07 mm
Thickness, insulation	0.21 mm
Wire colors	brown, white, blue, black
Material conductor insulation	TPE
Conductor material	Tin-plated Cu litz wires
Insulation resistance	≥ 20 MΩ*km
Conductor resistance	≤ 57.6 Ω/km
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Ambient temperature (operation)	-25 °C ... 90 °C (cable, fixed installation)

## Classifications

### eCl@ss

eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27143423
eCl@ss 5.1	27143423
eCl@ss 6.0	27143423
eCl@ss 7.0	27449001

# Panel feed-through - SACC-EC-M12FS-4CON-PG 9/0,5 VA - 1554649

## Classifications

eCl@ss

eCl@ss 8.0	27449001
------------	----------

ETIM

ETIM 3.0	EC002061
ETIM 4.0	EC002062
ETIM 5.0	EC002062

UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

## Approvals

Approvals

Approvals

GOST / UL Recognized / GOST

Ex Approvals

Approvals submitted

Approval details


GOST
------

UL Recognized	
mm <sup>2</sup> /AWG/kcmil	26-20

# Panel feed-through - SACC-EC-M12FS-4CON-PG 9/0,5 VA - 1554649


## Approvals

Nominal current I <sub>N</sub>	4 A
Nominal voltage U <sub>N</sub>	250 V




## Drawings

Dimensioned drawing



M12 flush-type socket, can be positioned

Circuit diagram

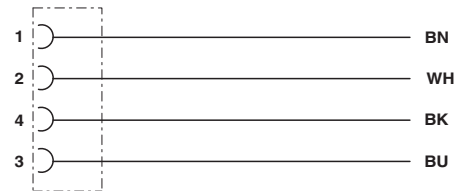

Contact assignment of the M12 plug and the M12 socket